


3U Busless Prototyping Board

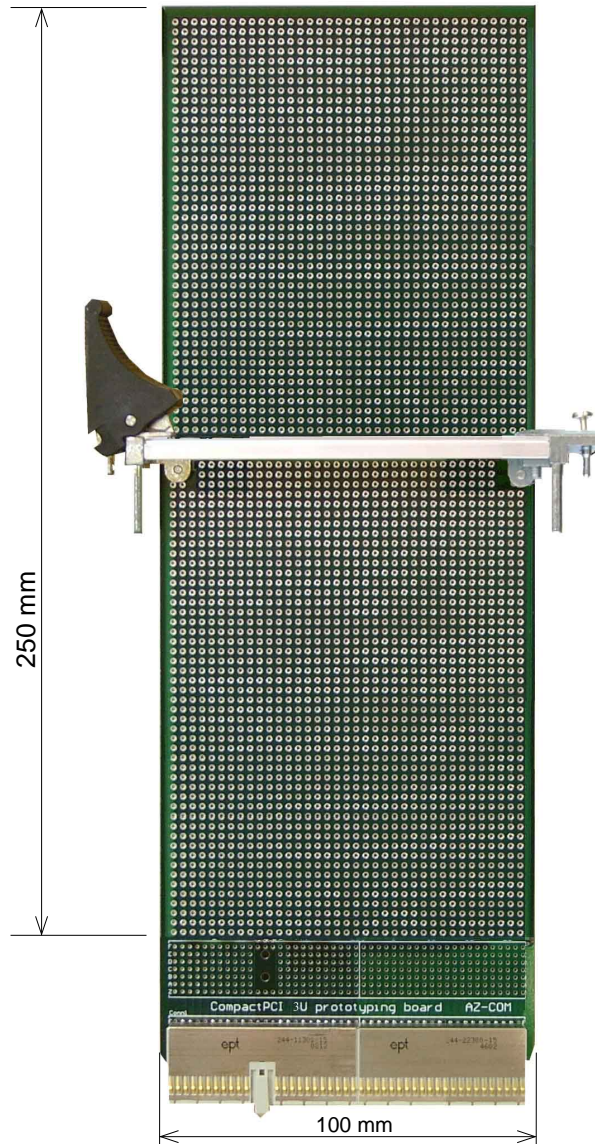

P/N cPCI-08-07-3

SPECIFICATIONS:

P/N cPCI-08-07-3

Dimensions: 293 mm x 132 mm

Weight: 6.3 oz (179 gram)

Connections: All signals straight through.

Maximum Current: 50mA/pin

Hole Pattern: 0.035" holes on 0.1" grid.

Material: 4 layer FR4

The 3U busless prototyping board is designed to aid development of adapter cards using 2mm Hard Metric connectors. This product can be used for standard 3U cPCI products but it is also designed for other applications that use 3U form factor but do not necessarily conform to cPCI specifications in use of pins of the connector. Connector signals are connected individually on a 1-1 basis with no bus structure.

Typical custom modification offered by AZ-COM includes installing a bus interface device on the board. For other related products or optional and custom configurations visit our website or call us at the number below.