


# 3U Busless Mini Extenders



**P/N cPCI-M28-05-33**  
 Male top



**P/N cPCI-M28FR-05-33**  
 Rear I/O Male top

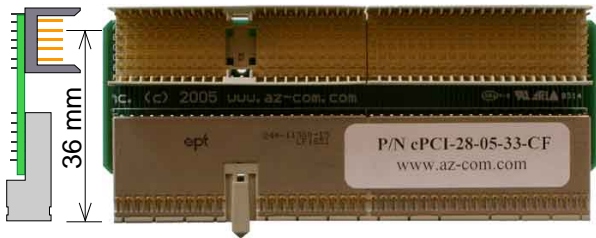

**P/N cPCI-28-05-33-CF**  
 Right Angle Male top



**P/N cPCI-28-05-33-CR**  
 Rear I/O Right Angle Male top




**P/N cPCI-28-05-33-CFR**  
 Front and Rear I/O Right Angle Male top



**P/N cPCI-28-05-33**  
 Female top



**P/N cPCI-28FR-05-33**  
 Rear I/O Female top

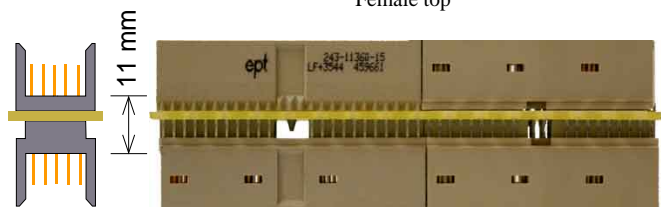

**P/N cPCI-08-05**  
 Connector Saver

## SPECIFICATIONS:

Connections:	All pins straight through.
Maximum Current:	50mA/pin
Dimensions:	Width: 100 mm
Weight:	2.6 oz (74 gram)
Material:	4 layer FR4

The 3U Busless Mini Extenders are designed to protect backplane connectors from damage and to aid in the design, testing and implementation of adapter cards that use 2mm Hard Metric connectors. Connector signals are connected individually on a 1-1 basis with no bus structure.

This product can be used for standard 3U cPCI products but it is also designed for other applications that use 3U form factor but do not necessarily conform to cPCI specifications in use of pins of the connector. Extenders with Female top use Connector Saver making repair of damaged pins inexpensive, quick and easy. If bus structure is desired on J1, use parts with -30 suffix. For other related products or optional and custom configurations visit our website or call us at the number below.